

- NOTE:
1. THE 8" THICK CONCRETE PAD SHALL BE OF 4,000 PSI STRENGTH
 2. THE CONCRETE PAD SHALL BE LOCATED ON COMPACTED SOIL OR STONE
 3. THE REBARS AS SHOWN ABOVE SHALL BE SUPPORTED BY CHAIRS

NOT TO SCALE

REVISED: 3-4-19



DUMPSTER PAD DETAIL

STD. NO.


DATE

801.1

3-2-10

SHEET 1 OF 2

CITY OF MORGANTON

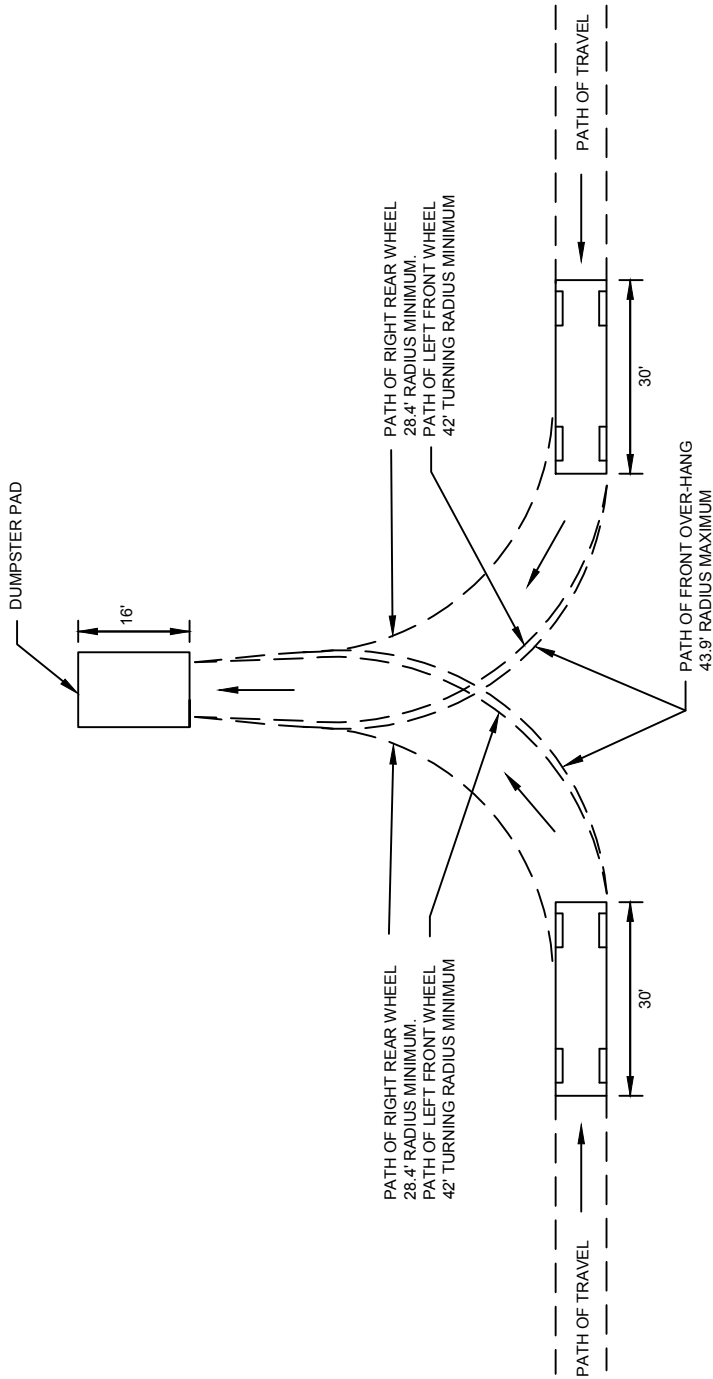

NOT TO SCALE

REVISED: 3-4-19



**TURNING RADIUS FOR FRONT LOADING
SANITATION VEHICLE**

STD. NO.

DATE

801.2

3-2-10

SHEET 2 OF 2

CITY OF MORGANTON